

MAX TRAILER

PREMIUM QUALITY AS STANDARD



MAX TRAILER

Premium quality as standard!

MAX Trailer is a completely *innovative concept* in the sector of semi-trailer- and trailer construction.


Standardized components and an accordingly coordinated manufacturing process make it possible to produce an absolutely *high-quality* product.

This quality is based on the *technical know-how* and the *long-standing experience* of Faymonville, which the brand **MAX** Trailer is part of.

Since the market introduction in 2012, the dealer network has been enlarged continuously. From the beginning, **MAX** Trailer experienced rapid growth in the transportation industry.



MAX510

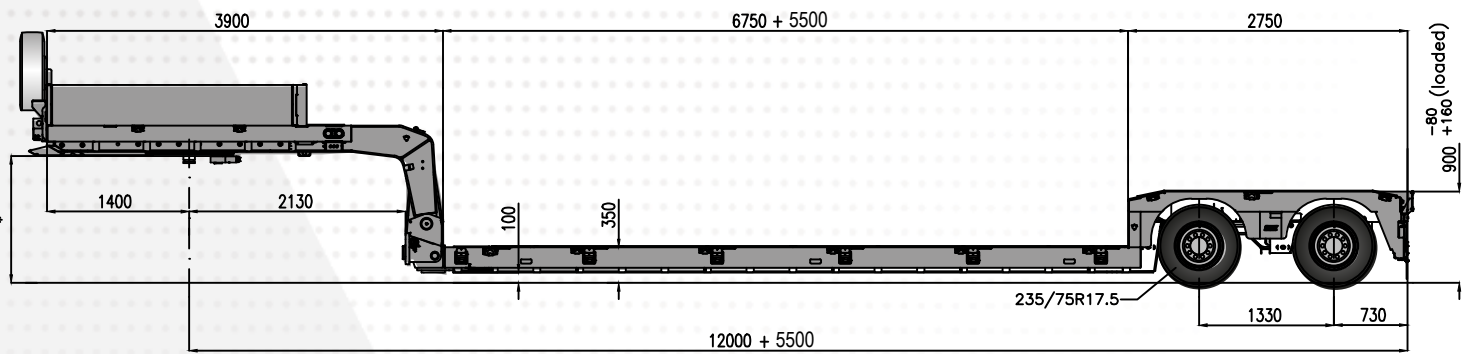


>> Options



Axles	2
Suspension	pneumatic
Steering	knuckle-steering

- SAF axles
- Standard options
- Tyres 17.5"

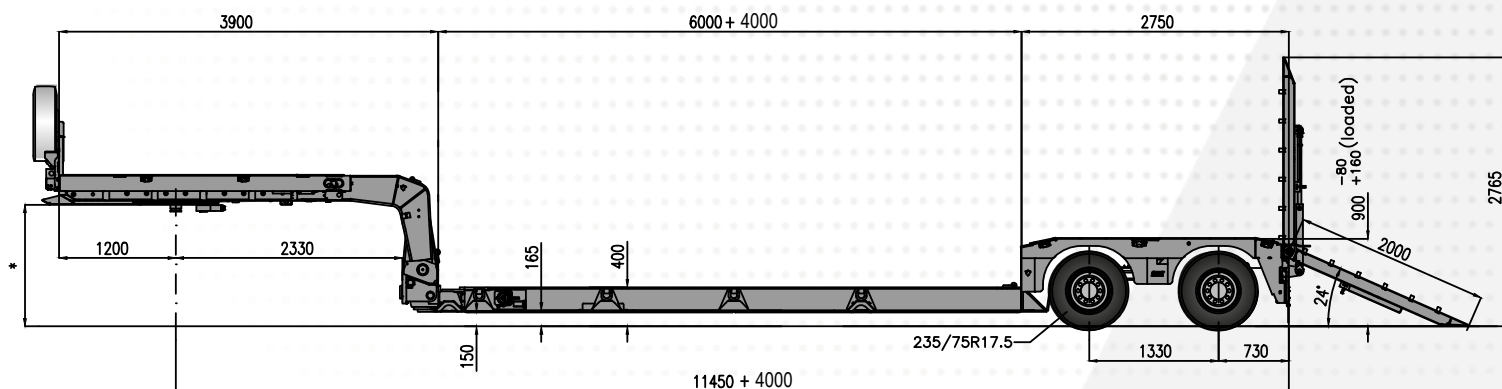

»» Technical data

- Axles with drum brake, pneumatic suspension with lifting/lowering valve
- Tyres 235/75 R 17.5 according to choice of the manufacturer
- Top quality and long-lived protection against corrosion of the welded frame (standard steel grid blasted) guaranteed by
 - a 2 components of 2K zinc rich epoxy primer
 - a high quality 2 components 2K direct to metal top coat
- Rear end metalized and painted in RAL 9010 (Reinweiss)
- Electric system conform to the EU-regulations lighting 24 volt ASPÖCK-NORDIK (ASS3)
- ASPÖCK-UNIBOX on the galvanized front connection ledge with socket 24N, 24S & 15 pole. Connection to the ISO norm
- Reflectors (red or yellow) according to the EU regulation at the rear
- Yellow reflective tape according to the EU regulation over the entire length, on the extension and at the rear
- Manual and description
- 2 wheel chocks with carrier
- King pin 2"
- Red and yellow air couplings on the galvanised front connection ledge
- Axle tools
- Braking system following EU-regulations with EBS-E (4S3M) system, without connection to the truck
- A mud flap (www.MAX Trailer.eu) at the rear of the trailer
- Holder for one beacon light at the rear of the trailer
- One galvanised steel headboard, height ± 1200 mm
- On the right and left side under the gooseneck and at the rear of the trailer one holder for the warning boards and socket